WarmlyYours
Radiant Heating

WIRING DIAGRAM
SCA-DUAL (PD PRO) ADVANCED CONTROL
DIRECT TO HEATING CABLE/ROLL

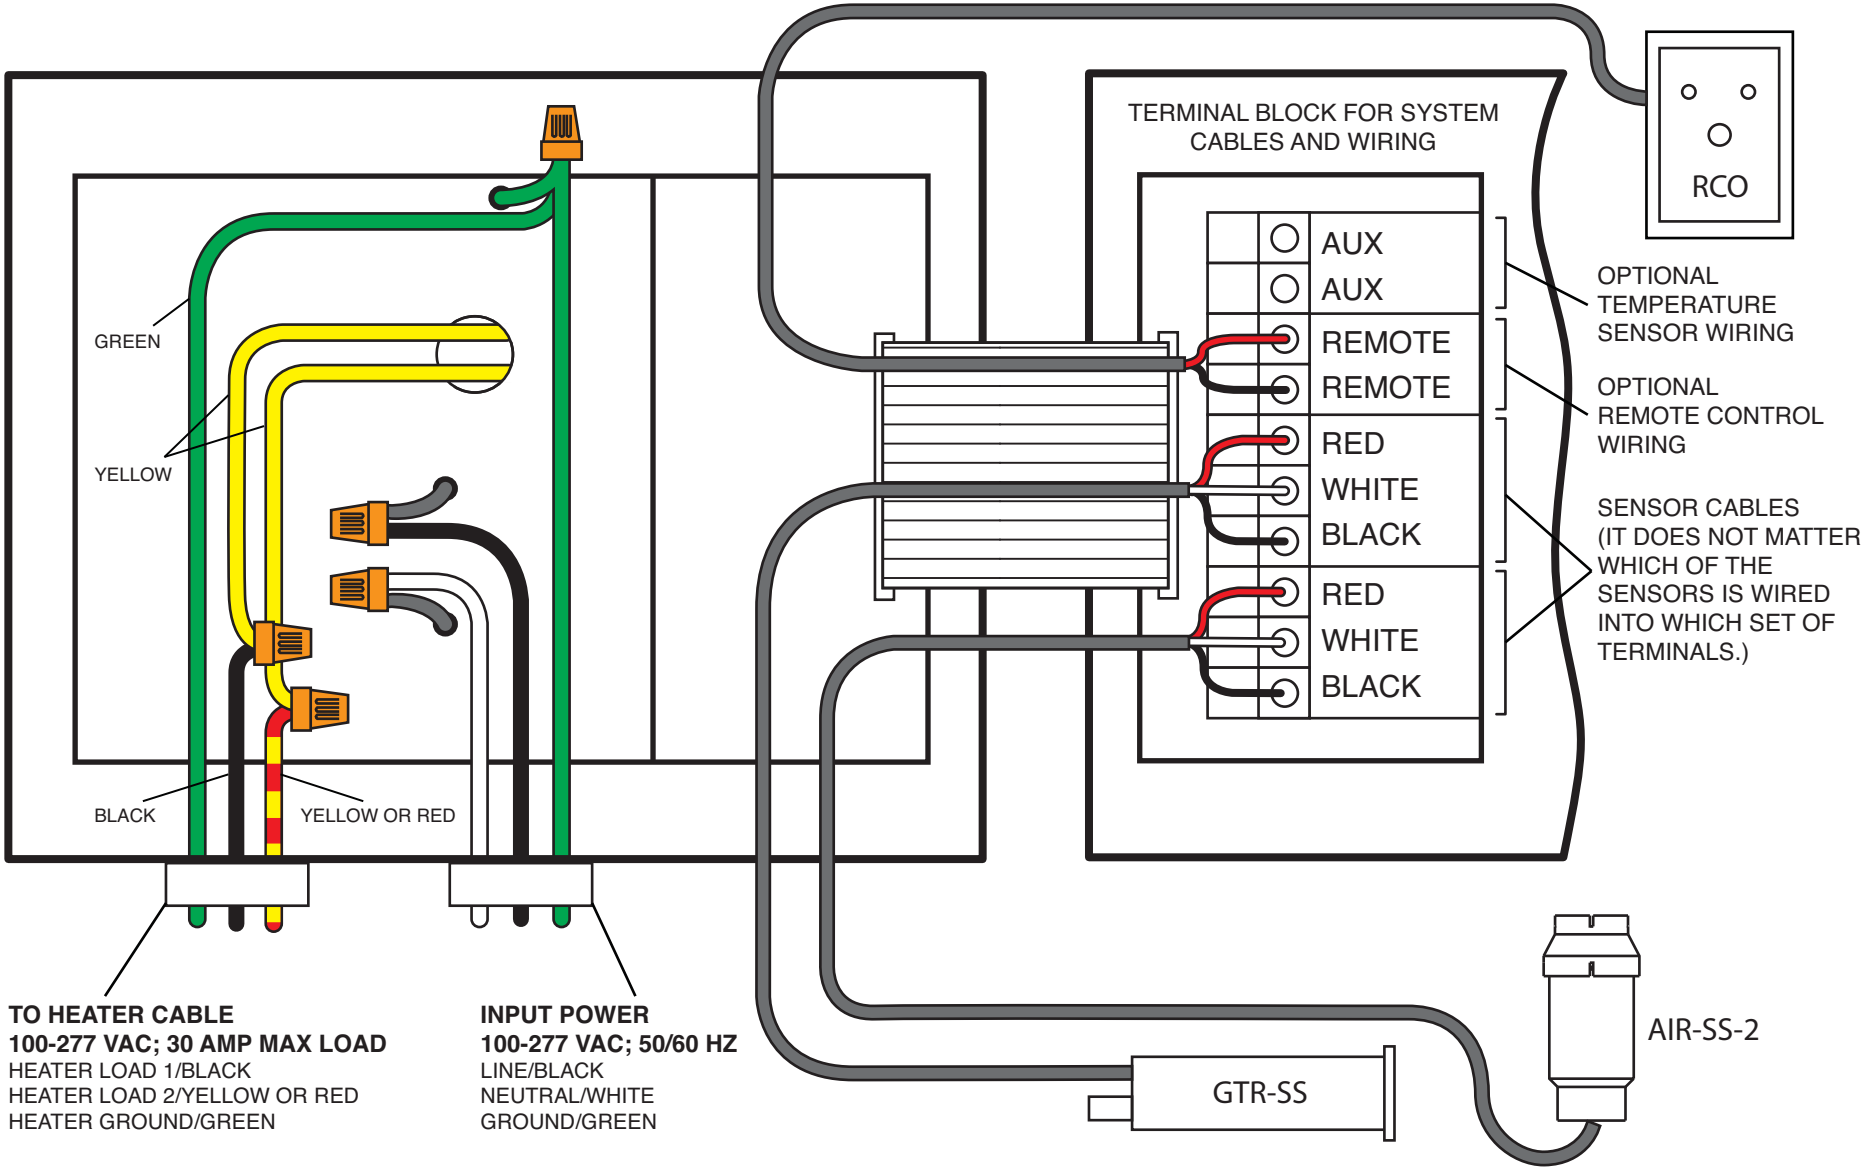

TO HEATER CABLE
100-277 VAC; 30 AMP MAX LOAD
HEATER LOAD 1/BLACK
HEATER LOAD 2/YELLOW OR RED
HEATER GROUND/GREEN

INPUT POWER
100-277 VAC; 50/60 HZ
LINE/BLACK
NEUTRAL/WHITE
GROUND/GREEN